


G40-JG

- Enhanced heat resistant resin

Keywords

- High resistant : 80°C
- Various Industrial usage
- Jaws Gray color, high performance

Color	Jaws Gray
Density(g/cm ³ , 경화후)	1.12~1.18
Tensile Modulus(MPa)	2621~2775 MPa
Tensile Strength(MPa)	44~56 MPa
Elongation at Break (%)	7~11%
Flexural Strength(MPa)	70~76 MPa
Flexural Modulus(MPa)	2675~2765 MPa
HDT (°C, @66psi≈0.45MPa)	80~93°C

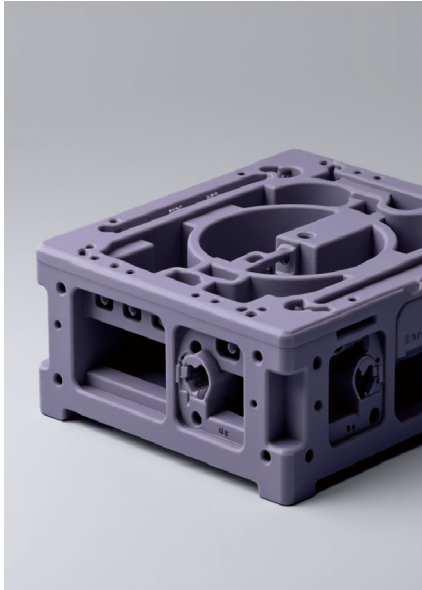

Characteristics

- Mock-up & Prototyping
- Moderate elongation
- Mass Productions
- Workability
- Impact resistance
- High detail and textured parts
- Cost-effective solutions
- Quick Production

www.glucklab.com

The characteristics of these products may differ according to environments of 3D printer and specific factors in software, post processing conditions, product application, operating conditions, or with end use. Specifications subject to change without notice.
© 2022 by Gluck, Inc. All rights reserved.

GLUCK 글럭